

THIS DOCUMENT IS ISSUED IN STRICT CONFIDENCE
 ON CONDITION THAT IT IS NOT COPIED REPRINTED
 OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY
 OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT
 OF SOUTH BAY CABLE CORPORATION.

REVISION		
DESCRIPTION	DATE	APPROVAL

SINGLE CONDUCTORS-4 UNITS

Awg No. 26(7x0.0063")B/C
 DC Resistance @ 20° C ≤ 46 Ohms/1000 Ft
 Polypropylene Insulation
 Voltage Rating: 300 V
 Color Code: Brown
 Red
 Orange
 Yellow

TAPE

Mylar binder tape over cabled conductors

STRENGTH MEMBER


Zylon™ fiber braid

JACKET REINFORCEMENT

Dacron braid

JACKET

Polyurethane
 Color: Light Green

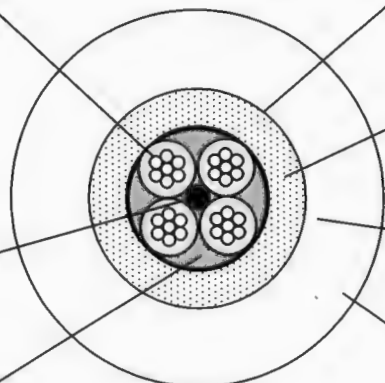

FILLER

Nylon rod filler (center)

WATER-BLOCKING

Major interstices are water-blocked

ESTIMATED VALUES

Nominal O.D. -----	0.230 Inches
Weight in Air -----	25 Lbs/1000 Ft
Weight in Seawater -----	7 Lbs/1000 Ft
Breaking Strength -----	3,000 Pounds
Maximum Load -----	600 Pounds
Min. Bend Diameter -----	6 Inches

**South Bay
 Cable**



Drawn	O.L.	11/20/19	Approval	
Checked			Approval	

E-M CABLE

SB-51149